



## Groundwater resources evaluation in the Piedmont zone of Himalaya, India, using Isotope and GIS techniques

*M. Israil<sup>1</sup>, Mufid al-hadithi<sup>2</sup>, D. C. Singhal<sup>2</sup>, Bhishm Kumar<sup>3</sup>, M. Someshwar Rao<sup>3</sup> and S. K. Verma<sup>3</sup>*

### Abstract

Integrated geohydrological, isotopes and Geographical Information System (GIS) techniques have been used to delineate groundwater resources potential in the Piedmont zone of Himalayan foothill region, Uttaranchal, India. Thematic maps for hydrogeomorphology, slope, and drainage density have been prepared and integrated with the help of GIS by assigning the weights to various attributes controlling occurrence of groundwater to generate the groundwater potential map for the study area. The results indicates that the southern part of the study area has very good groundwater potential whereas the steeply sloping area in the northern part having high relief and high drainage density possesses poor groundwater potential. The groundwater potential zones are found in agreement with the available yield data of tubewell. Vertical component of recharge to groundwater due to precipitation varies from 3 to 13 %, which has been estimated using Tritium Tagging Technique. The estimated recharge to groundwater shows a linear relationship with environmental tritium contents in the water samples. This indicates that the precipitation is the major source of recharge in the study area. On the basis of environmental tritium contents, it has been found that recharge to groundwater is taking place at higher altitudes (300-400m, AMSL) in the Bhabhar region where the shallow and deeper aquifers have good interconnection. The estimated groundwater flow rate for the deeper aquifer is 1.2 m/d. The groundwater flow pattern estimated from isotope techniques has been validated from flow pattern determined by the depth of groundwater table.

**Key words:** piedmont, Himalayan foothill region, Tritium Tagging Technique, isotopic techniques.

### Introduction

Groundwater forms one of the important sources of potable water. It is believed to be safe, free from pathogenic bacteria and from suspended matter. The rate of withdrawal of groundwater is increasing continuously due to faster pace of population growth accompanied by agricultural and industrial development. This has increased the concern on groundwater resource evaluation and its management for sustainable development. The occurrence and movement of groundwater in an area is governed by several factors such as topography, hydrogeomorphology, geology, drainage pattern, land use, climatic conditions and inter relationships among these factors (Pratap et al., 2000). Many authors have used remote and GIS to generate groundwater potential map (Saraf. A.K and Chaudhary, 1998; and Murthy 2000; Krishnamurthy, et al., 1996; Ravi and Mishra, 1993). The satellite remote sensing data along with Survey of India topographical maps, collateral information and limited field checks, have been used to establish the base line information for groundwater prospective zones (Singh et al., 1993; Chi and Lee, 1994; Haridass

---


<sup>1</sup>Department of Earth Science, <sup>2</sup>Department of Hydrology, <sup>1,2,3</sup> National Institute of Hydrology Roorkee, Roorkee-247667, India  
Corresponding author E-mail: [mohdfes@iitr.ernet.in](mailto:mohdfes@iitr.ernet.in), Phone: 91-1332-285078; Fax: 91-1332-273560

et al., 1994; Tiwari and Rai, 1996; Das et al., 1997; Ravindran and Jeyaram, 1997; Pratap et al., 1997; Thomas et al., 1999; Harinarayana et al., 2000; Muralidhar et al., 2000; Obi Reddy et al., 2000). Satellite data have been largely used as a surface indicator of subsurface features (groundwater occurrence and movement). To determine groundwater recharge and movement, isotopic and geochemical tracer methods have been used by various worker (Datta et al. 1973; Sukhija and Rama, 1973; Datta, 1975, Sukhija and Shah, 1976; Verhagen et al. 1979; Gupta and Sharma 1984; Athavale and Rangarajan, 1988; Sukhija et al. 1996 a,b). Other methods such as Chloride method and soil moisture methods have also been used to determine vertical groundwater recharge (Allison and Hughes, 1978; Edmunds and Walton, 1980, Sukhija et al. 1988, Sukhija et al 2003). Bradbury, 1991; Rose, 1992 have used environmental isotopes to identify the recharge areas, groundwater flow direction and velocity. Tritium ( $^3\text{H}$ ) has also been used to estimate absolute and relative age of groundwater (Hendry, 1988a; Bradbury, 1991; Simpkins, 1991; Simpkins, and Bradbury, 1992; Simpkins and Parkin, 1993; Simpkins, 1995; Rao et al., 2001 and Zuber, et al., 2003) and to estimate groundwater recharge rates (Knott and Olimpio, 1986; Larson et al., 1987; Daniels et al., 1991). In the present study, an integrated geohydrological, isotopes and GIS techniques have been used for groundwater resources evaluation in the piedmont zone situated in Himalaya foothill region of India.

#### **GIS based data generation for the study area**

The Himalaya is skirted by an upper piedmont zone along its southern margin and is referred differently as "Kandi" in the northwestern India and "Bhabhar" in the northern India. The lower piedmont zone located further southward is referred as "Tarai". The piedmont zone is located to the south of Siwalik foothills of Himalayas and presents several difficulties in groundwater exploration and development due to occurrence of thick deposits of poorly sorted unindurated sediments, deep water table, and the associated problems in drilling. Due to these problems, the groundwater availability in the area becomes cost prohibitive and is generally unavailable to the rural users for the societal needs. Further, much of the groundwater is recharged by percolation to deep aquifers situated further downstream, because of the southward gradient of the land surface in the Bhabhar zone. The study area is shown in figure 1, located between Latitude 29° 50' 00" to. 30° 11' 21" North and Longitude 77° 54' 19" to 78° 06' 21" East, falling in Ratmau and Pathri Rao watershed covering an area of approximately 430 km<sup>2</sup>.

An integrated geographic database consisting of spatial and non-spatial data has been generated for the study area. The spatial data consists of thematic maps generated from topographic and remote sensing data while the non spatial data comprises of attributes, primarily derived from ground checking during field survey and those available in literature. These data have been stored in GIS environment. The Image processing software ERDAS (ERDAS, 1997) is used to enhance Indian Remote Sensing (IRS), LISS III image for interpretation of the hydrogeological features, which in turn are digitized using GIS (Arc View 3.1 version) software to generate hydrogeomorphology and drainage density thematic maps of the study area. A slope map is prepared from the elevation contours available in the Survey of India (SOI) topo-sheet on 1:50,000 scale.

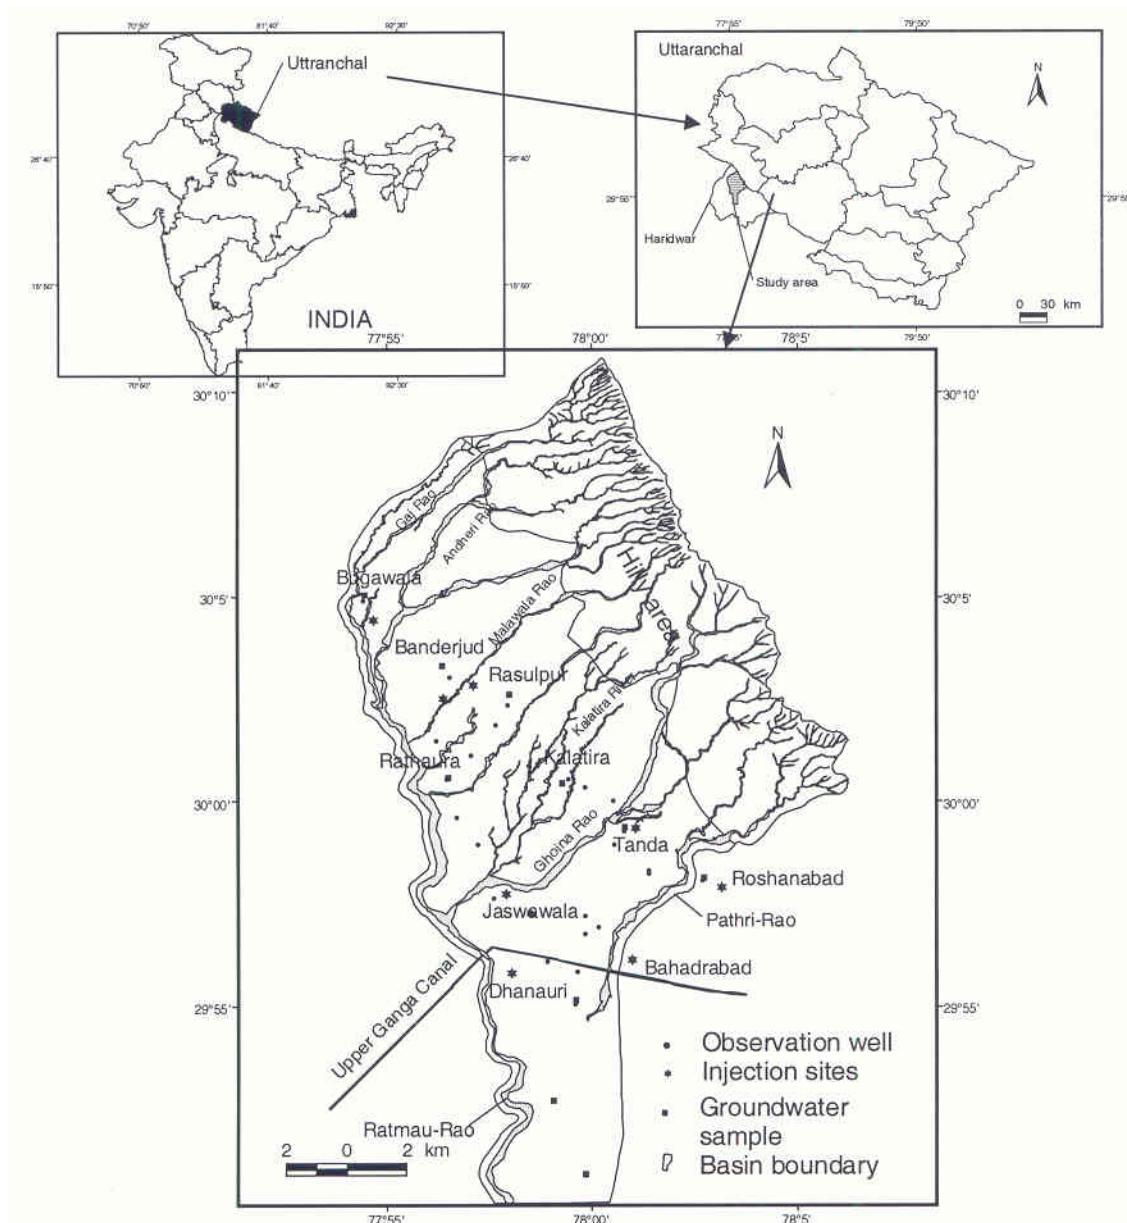

**Fig.1: Location map of the study area showing locations of data points.**

Based on physiographic characteristics, the area is classified into four geomorphic units. The geomorphic boundaries are digitized on the enhanced image through GIS and the generated hydrogeomorphological map is shown in Fig. 2. The Upper Piedmont zone (covering 194 km<sup>2</sup> of the study area) also known as Bhabhar, bordering the Siwalik Hills with gentle slope comprise of unconsolidated coarse material. For groundwater point of view this belt provides an excellent hydrogeological setup for recharge and infiltration. The depth to groundwater table monitored in this unit varies from 11 to 29 m. Groundwater prospects in this belt are good to very good. The Lower Piedmont (also known as Tarai) is separated from the Upper Piedmont (Bhabhar) by the spring line along their junction line and is covering about 107 km<sup>2</sup> of the area. This zone is composed of coarse-grained sand and clays with gravel (boulders and pebbles). The

groundwater level monitored in this unit varies from 2 to 7m and the groundwater prospects are very good to excellent.

Topographic information has been collected from SOI topo-sheet on 1:50,000 scale and a Triangulated Irregular Network (TIN) has been generated from elevation contours (20m intervals) and spot elevations. The slope percent map generated from the TIN data for the study area is shown in Fig. 3. Nearly 40 percent of the total area shows slope of 0-1%. Whereas the steep slope (more than 10%) is found in the north and northeastern parts of the study area.

The analysis of drainage pattern of the area has been done to study the runoff/recharge conditions. In general, a dense drainage network indicates a less permeable formation, such as, shale/clay stone, which is less favorable for recharge conditions. A surface drainage map has been generated from SOI toposheet at 1:50,000 scale and Indian remote sensing LISS III data. The drainage pattern is mainly dendritic on higher slopes and sub-dendritic on gentle slopes. Maximum drainage density of 1.9 km/km<sup>2</sup> is observed in the northern part (covering about 126 km<sup>2</sup>) and minimum of 0.35 km\km<sup>2</sup> in the southern part of area particularly in the Lower Piedmont unit (covering about 103 km<sup>2</sup> ). The generated drainage density map of the area is shown in Fig. 4.

The occurrence and movement of groundwater is governed by hydrogeomorphological, geological, slope, and drainage density etc. These features are assigned different weights depending on their influence on the groundwater potential (Srivastava and Bhattacharya, 2000; Obi Reddy, et al., 2000 and Pratap, et al., 2000). The different units in each theme are assigned ranks from 1 to 4 on the basis of their significance with reference to their groundwater potential. The final score of each unit of a theme is equal to the product of rank with their respective weight. The classification of these weights and rank of each theme and unit are shown in table 1.

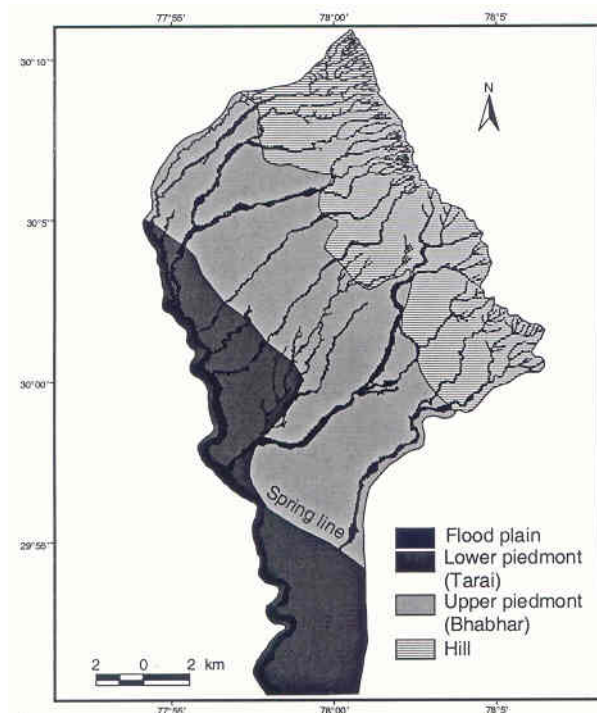


Fig. 2: Hydrogeomorphology of the area


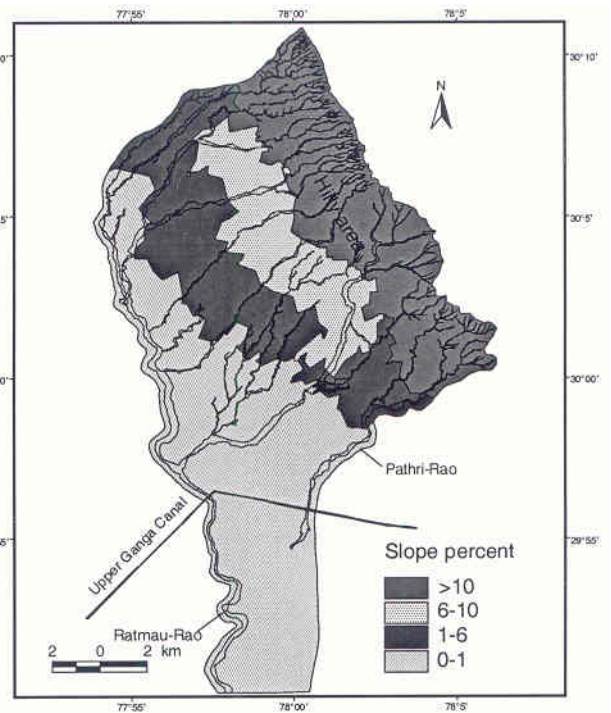


Fig. 3: slope map of the area

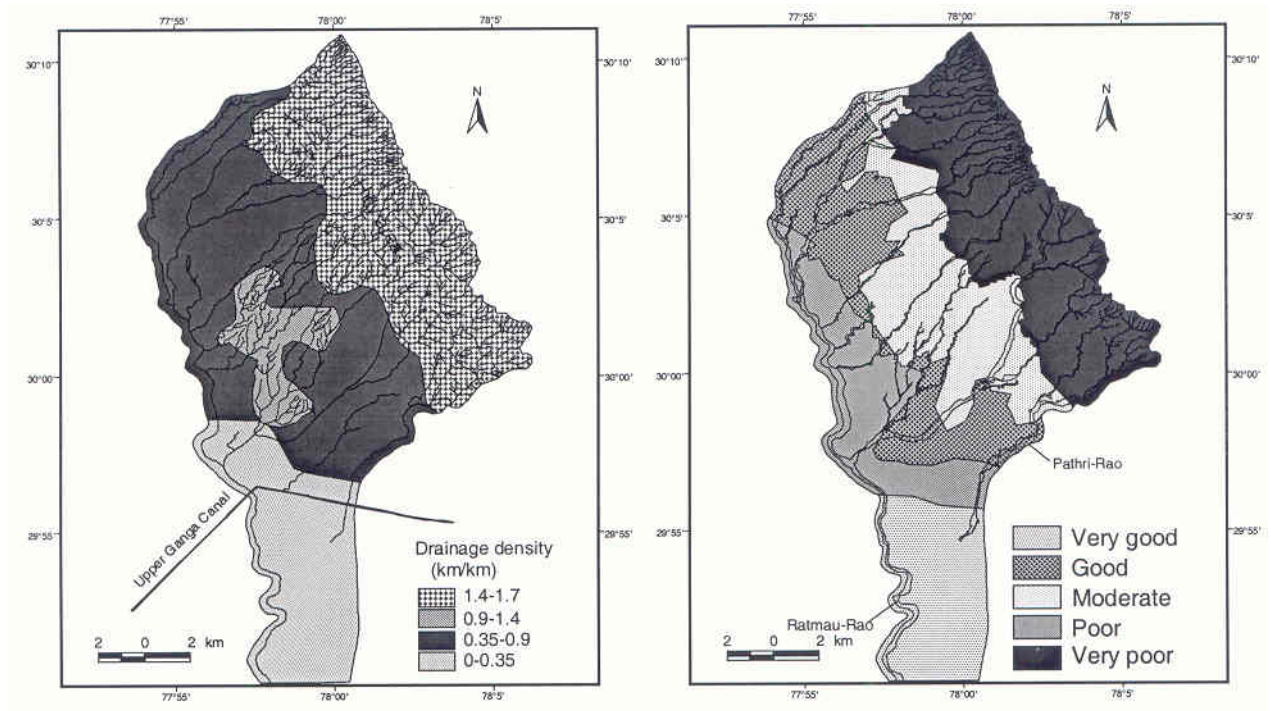

**Fig. 4: Drainage density map of the study area      Fig. 5: groundwater potential map**


Finally the thematic maps of each theme are overlaid step by step to generate a composite map of the study area. The composite map is associated with a particular set of parameters considered in the study. The evaluation of groundwater potential is done by adding the scores of various themes. Thus the entire area is qualitatively divided into five zones vis-à-vis their groundwater potentiality namely very good, good, moderate, poor and very poor. The final thematic map showing the various groundwater potential zones in the study area is shown in Fig. 5. From the figure, it can be seen that the groundwater potential in the northern part of the study area (covering about 135 km<sup>2</sup> of the study area) is poor, due to very steep slopes and very high drainage density, resulting in low infiltration and high runoff. The groundwater potential is moderate to good (covering 172 km<sup>2</sup> of the area) in the middle part, due to gentle slope and low drainage density. In the southern part of the study area, about 60 km<sup>2</sup> of area has very good groundwater potential due to gentle slope and very low drainage density in the lower piedmont geomorphic unit while the remaining area (about 63 km<sup>2</sup>) has moderate to poor groundwater potential. The generated groundwater potential map is validated from the yield data obtained from 10 tubewells located in the different groundwater potential zones (moderate to very good) shows that a zone of very good potential is having good water yield ( 121-257 m<sup>3</sup>/h) and moderate to good having yield ( 63-225 m<sup>3</sup>/h). It has also been observed that the locations with gentle slope and low drainage density in the piedmont geomorphic unit have comparatively higher water yields than the other locations.

Table 1 Rank, weight and score for attribute for various themes with respect to groundwater potential


Theme	Weight	Classes	Rank	Score
Hydrogeomorphology	5	Lower piedmont	4	20
		Upper piedmont	2	10
		Hill	1	5
Geology	4	Alluvial fan	3	12
		Siwalik hill	1	4
Slope	3	0-1	4	12
		1-5	3	9
		5-10	2	6
		>10	1	3
Drainage density	2	0.0-0.35	4	8
		0.35- 0.9	3	6
		0.9- 1.1	2	4
		1.1-1.9	1	2
Landuse	1	Cultivated	2	2
		Uncultivated	1	1
		Forest	1	1

### Estimation of recharge

Tritium Tagging Technique has been used at eight sites (shown in fig. 1) for the estimation of recharge to groundwater due to precipitation (Zimmerman et al., 1967a). The groundwater recharge has been estimated by monitoring the vertical movement of injected tritium at each site during the period from the time of injection i. e. pre-monsoon (before onset of rainy season) to the post-monsoon (after the rainy season). The radioactive tritium obtained from Bhabha Atomic Research Center (BARC), India with specific activity of 40 micro Curie/cc was injected in five holes placed in a circular geometry at each site. The soil samples at each 10 cm level up to a depth of 2.5 meter were collected from the nearby place at each site at the time of injecting tritium and after the rainy season in Oct. 2002 from the injected points. The liquid scintillation counter (LSC) has been used to measure tritium activity (counts per minute) in each sample. The counting rates so obtained are shown with depth for two representative sites in Fig 6.

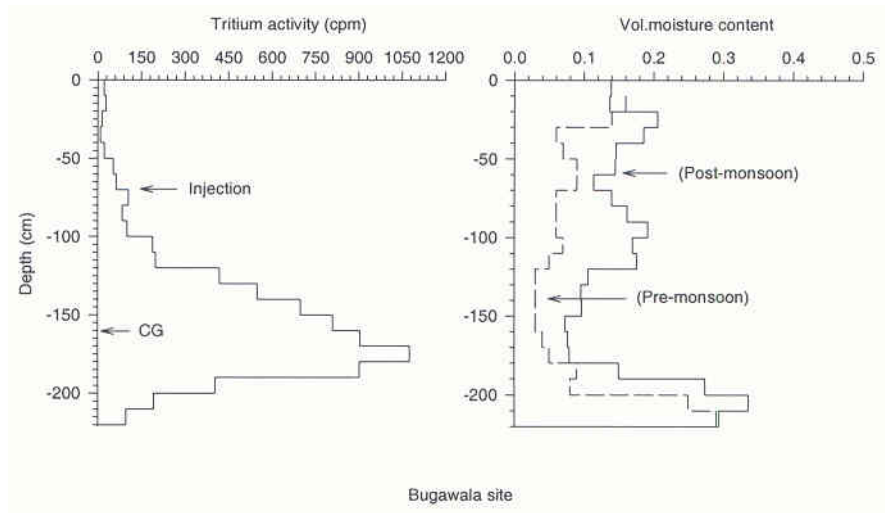


**Fig. 6. Movement of injected tritium and soil moisture at representative sites (Bugawala, Bandarjud)**

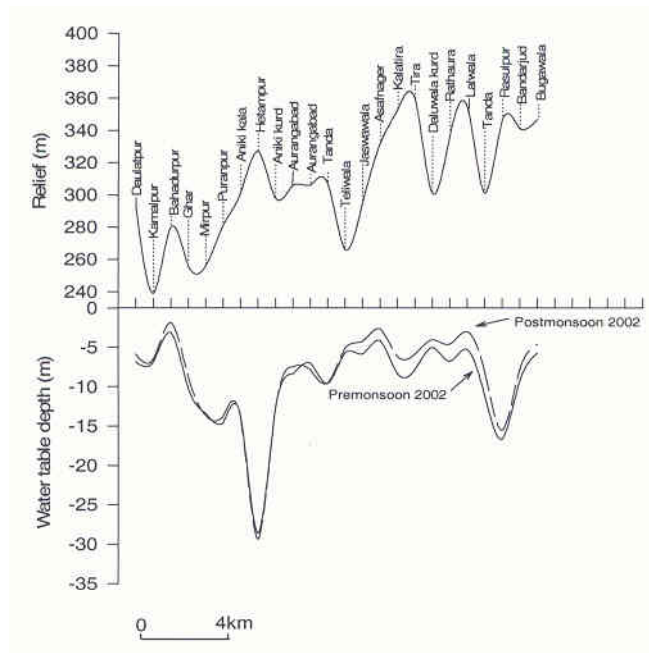

**Fig. 7. Surface elevation and water table fluctuation in the study area.**

The amount of recharge to ground water due to precipitation between the time interval of Tritium injection (pre-monsoon) and sampling (post-monsoon) can be estimated by multiplying the tritium peak shift and effective average volumetric moisture content in the tritium peak shift region. Mathematically, the equation for the estimation of percentage of recharge to groundwater can be written as (Zimmerman et al. 1967a,b)

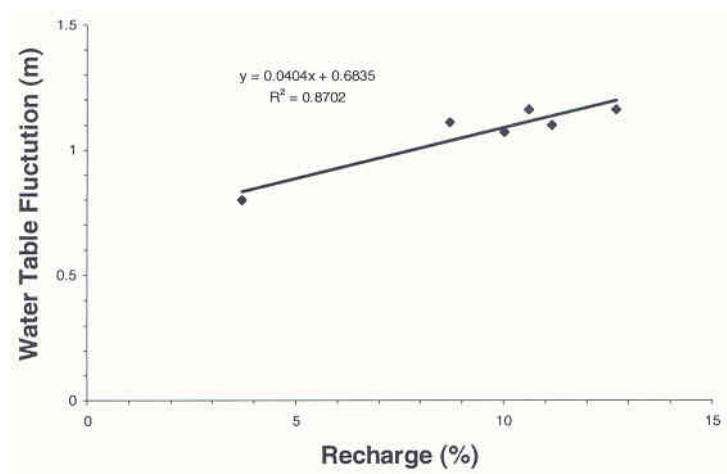

**Fig. 8. Relationship between the observed water table fluctuation and the percentage of recharge to groundwater estimated using tritium tagging technique.**

$$R = \theta_v * d (100/p) \quad (1)$$

Where,

'R' is the percentage of recharge to groundwater,

' $\theta_v$ ' is the effective average volumetric moisture content in the tritium peak shift region,

'd' is the shift of tritium peak in cm and

'p' is precipitation and/ or irrigation in cm.


Volumetric moisture content each soil sample was estimated in the laboratory at National Institute of Hydrology (NIH), Roorkee. The depth of groundwater table was also monitored at these sites at the time of tritium injection (pre-monsoon) and after three months (post-monsoon). Fig. 7 shows the groundwater table fluctuation with surface elevation. The percent of recharge estimated using the tritium tagging technique shows linear relationship between the groundwater table fluctuations. It indicates that the vertical infiltration constitutes the net recharge in the study area (Fig. 8).

#### **Identification of recharges area and flow of groundwater**


Environmental isotopes have been used to delineate the recharge areas and mean groundwater flow rate. Twenty-one groundwater samples were collected from shallow and deeper aquifers, from eleven selected sites for the environmental tritium analysis. Tritium activity in groundwater samples was measured at the National Institute of Hydrology, Roorkee using an Ultra Low Level Liquid Scintillation Counter(ULLSC) and calibrating count rate with a standard prepared from standard no 4929E of known activity obtained from the National Institute of Standard and Technology, USA. In order to know the possible influence of the elevation on the recharge characteristics, the data have been analyzed done with respect to the ground elevation of the sampling sites. Finally the environmental tritium contents in the water samples were measured in Tritium Units (TU) as defined in standard literature ( IAEA 1983). The tritium content in all samples varies in the range from 0.9 to 12 TU. The plot of tritium activity in TU with the recharge

to groundwater in cm (estimated by tritium tagging technique) is shown in Fig 9, that shows a linear relationship.


The Fig. 10 &11 show the plot of tritium concentration in each sample with respect to the ground elevation of sampling site. This indicates that the recharge to groundwater is mainly taking place at higher altitudes (300-400 m AMSL)) in the Bhabhar region, where the shallow and deeper aquifers have good interconnection. On the basis of their topographic elevation, the groundwater sampling sites can be divided into the sites located in north of canal and the sites located in the south of canal. In the north of canal, high concentration of tritium (above 10 TU) is observed and the Siwalik hills act as a water divide line. This indicates the existence of youngest water in the area and act as groundwater recharge area in Siwalik hills which moves downward. One additional recharge area to shallow and deeper aquifer has also been identified close to the Teliwala village, the source for this recharge is probably Kalatira and Ghoina Rao rivers (fig. 1).

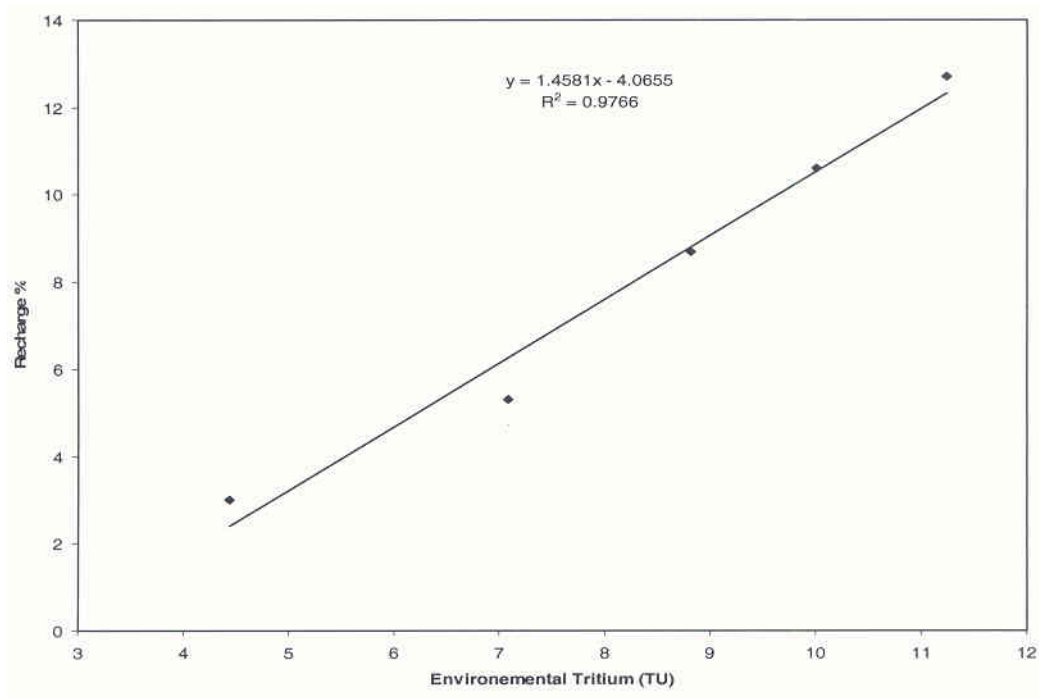

**Fig. 9. Relationship between recharge percent estimated by Tritium tagging technique and environmental Tritium**

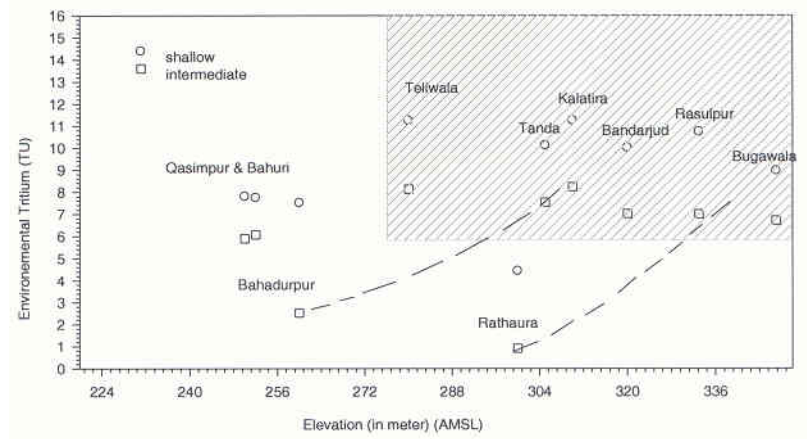

**Fig. 10. Plot showing variation of environmental Tritium concentration with elevation in the study area**

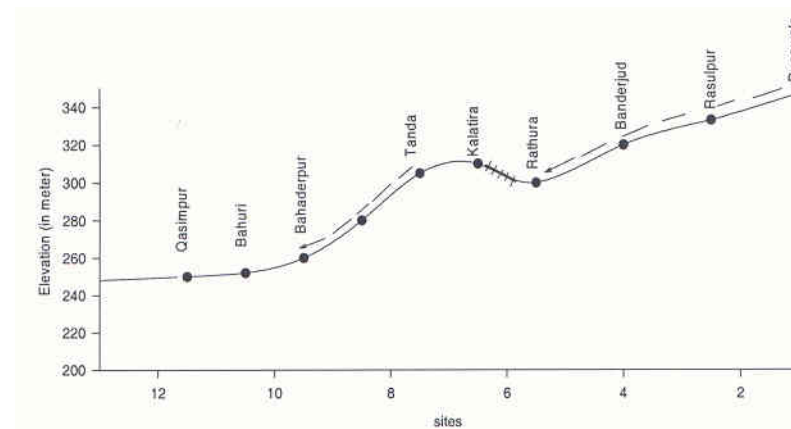

**Fig. 11. Topographical variation of sampling sites of the study area**


The topographic gradient in this region reduces from 0.005% to 0.001. These sites are therefore, expected to receive substantial recharge from these rivers, which originate in Siwalik Hills. On the basis of tritium contents, two additional recharge locations have also been identified close to the Bahuri and Qasimpur villages (Fig 10).

The mean flow rate of the groundwater in the study area (Ratmau- Pathri Rao watershed) has been estimated by analyzing the environmental tritium content in the water samples collected from the area. The methodology uses the fundamental radioactivity decay equation

$$A_t = A_0 e^{-\lambda t} \quad (1)$$

where,  $A_0$  and  $A_t$  are the radioactivity at time  $t = 0$  and  $t$  (in years),  $\lambda$  is the decay constant (0.0557 for tritium). The equation (1) can be used to calculate the travel time of the groundwater between the two locations by measuring the Tritium activity at these locations. The variation in the tritium activity measured in the water samples collected from the different locations in the deeper aquifer varies from 7.54 to 2.52 TU. The locations of higher and lower activity correspond to the recharge and discharge zones respectively. The estimated mean groundwater flow rate is 1.2 m/d in the study area. The values estimated by Rao et al (2001), for the Haridwar district in Uttaranchal is 1.1 m/d, which is very close to the present value. The groundwater flow pattern estimated on the

basis of TU has been correlated to groundwater flow pattern deduced from the groundwater table elevation data (Fig. 12).

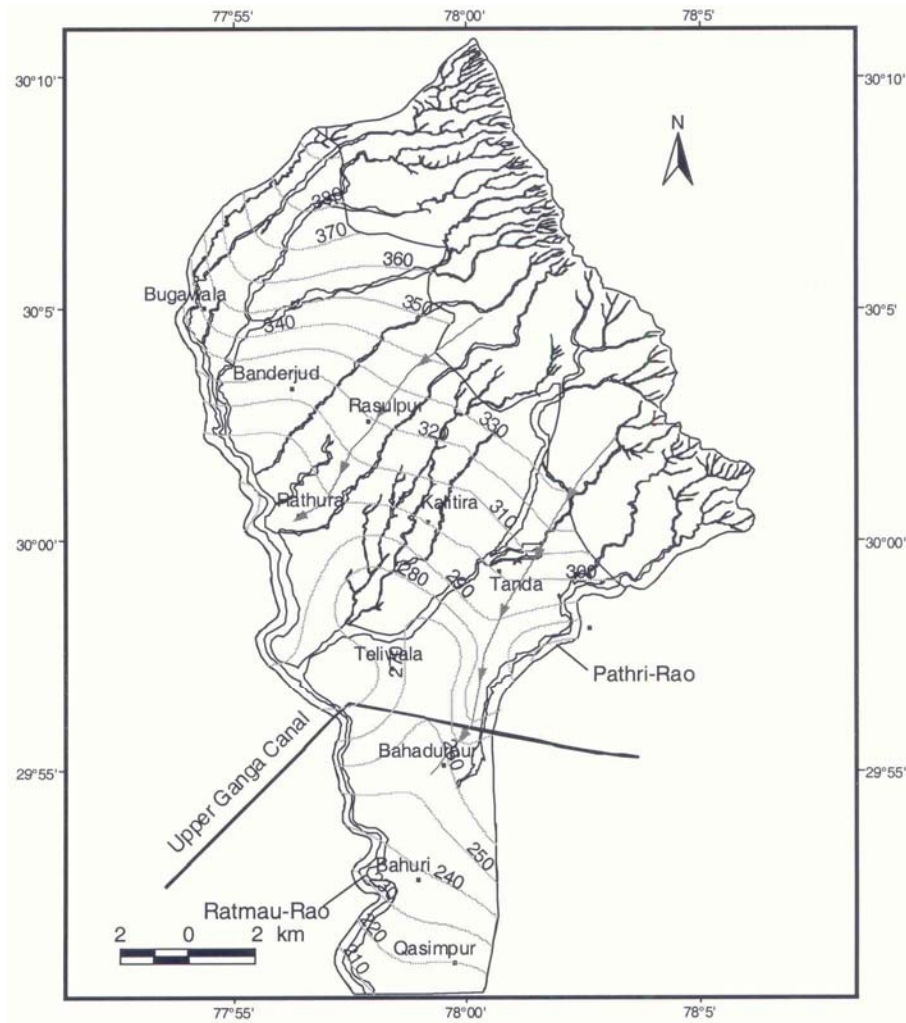

**Fig. 12** Groundwater table elevation contour AMSL map indicating flow pattern in the study area

### Conclusion

Integrated isotopes, geohydrological and GIS techniques have been used for the groundwater resources evaluation in the piedmont zone of Himalayan foothills region, India. Present study shows that the study area consists of groundwater potential varying from very good to poor zones. The groundwater potential in the northern part of the study area (covering about 135 km<sup>2</sup> of the area) is poor, due to very steep slopes and very high drainage density, resulting in low infiltration and high runoff. The middle part, covering 172 Km<sup>2</sup>, of the study area, has moderate to good potential due to gentle slope and low drainage density. In the southern part of the study area, 60 km<sup>2</sup> of area, the groundwater potential is very good due to gentle slope and very low drainage density in the lower piedmont geomorphic unit. Of the remaining study area, about 63 km<sup>2</sup> has

moderate to poor groundwater potential. The distribution of groundwater potential has been validated with the yield data of existing tube-wells in the study area.

Isotopic studies using artificial and environmental tritium have been carried out to determine recharge due to monsoon rainfall, recharge sources, recharge zones and average rate of flow of groundwater. The groundwater recharge estimated using Tritium Tagging Technique shows that the recharge in the study area varies between 3 to 13 percent of the rainfall. Environmental tritium activity varies from 1 to 13 TU which shows good linear relationship with the recharge percent estimated using Tritium Tagging Technique. The study indicates that the precipitation is the major source of recharge and groundwater moves in the direction of decreasing tritium activity (Tarai region) with the flow velocity of 1.2 m/d. Bhabhar zone and Siwalik Hills act as regional recharge zones to the deeper aquifers for the Tarai region. The interconnection between shallow aquifer and deeper aquifer is very good in the study area. The study indicates that the major quantity of groundwater is the result of precipitation infiltration in last 50 years.

## References

- Allison GB, Hughes MW (1978) The use of environmental chloride and Tritium to estimate total recharge to an unconfined aquifer. *Journal Soil Research* 16: 181-195.
- Athavale RN, Rangarajan R (1988) Natural recharge measurements in the hard rock regions semi-arid India using Tritium injection-a review. In "Estimation of Natural Groundwater Recharge" (ed. I. Simmers), pp 175-194. D. Reidel Publish. Co., Dordrecht/Boston.
- Bradbury KR (1991) Tritium as an Indicator of groundwater age in central Wisconsin, *Ground water* 29: 398-404.
- Chi and Lee, (1994) Extracting potential groundwater area using remotely sensed data and GIS techniques. *Proceedings, Regional Seminar on Integrated Applications of Remote sensing and GIS for land and water Resources Management ESCAP, Bangkok*, 64-69.
- Daniels, DP, Fritz, SJ and Leap, DI (1991) Estimating recharge rates through unsaturated glacial till by Tritium tracing *Groundwater*, 29:26-34.
- Das, S, Behera, SC, Kar, A., Narendra, P. and Guha, S (1997) Hydrogeomorphological mapping in groundwater exploration using remotely sensed data-A case study in Keonjhar District, Orissa. *J Indian Soc. Remote Sensing* 25(4): 247-259.
- Datta PS (1975) Groundwater recharges studies in the Indo-gangatic alluvial plains using Tritium tracer. Ph.D, Indian Institute of Technology Kharagpur, India
- Datta PS, Goel PS, Rama, Sangal, SP (1973) Groundwater recharge in western Uttar Pradesh, *Proc Indian Academic Science Section. A* 1-12
- Edmunds WM, Walton NRG (1980) A geochemical and isotopic approach to recharge evaluation in semi-arid zone: past and present. *Proc. Symp. Arid Zone Hydrol. Invest. Isot. Tech. IAEA, Vienna*, 47-68.
- ERDAS, (1997). ERDAS Imagine, Tour Guides. ERADS, Inc., Atlanta, USA, 454 p.

- Gupta, SK and Sharma, P (1984) Water resources and urbanization an environmental perspective for Gujarat, Souvenir Issue, 51st R & D Session of CBIP, Vadodara, 73-81.
- Haridass, VK., Chandraasekaran, VA., Kumaraswamy, K., Rajendran S. and Unni, K (1994) Geomorphological and lineament studies of Kanajamala using IRS-I data with special reference to groundwater potentiality. *Trans. Instt. Indian Geographers* 16(1): 35-41.
- Harinarayana, P., Gopalakrishna, GS Balasubramanian, A. (2000) Remote sensing data for groundwater development and management in Keralapura watersheds of Cauvery basin, Karnataka, India. *The Indian Mineralogists* 34(2):11-17.
- Hendry, MJ (1988a) Do isotopes have a place in groundwater studies, *Groundwater* 26:410-415.
- IAEA (1983): Guidebook on Nuclear Techniques in Hydrology, Technical report series No. 91, International Atomic Energy Agency, Vienna.
- Knott, JF Olimpio, JC. (1986) Estimation of recharge rates to the sand and gravel aquifer using environmental Tritium, Nantucket Island, Massachusetts, USA Geological Survey, Water-Supply Pap, 2297, 26 pp.
- Krishnamurthy, J., Venkataesa, Kumar, N, Jayraman, V. and Manivel, M (1996) An approach to demarcate groundwater potential zones through Remote Sensing and GIS, *International Journal of Remote Sensing* 17(10): 1867-1884.
- Larson, GJ., Delcore, MR. and Offer, S (1987) Application of the Tritium interface method for determining recharge rates to unconfined drift aquifers, I. Homogeneous case, *Journal of Hydrology* 91:59-72.
- Muralidhar, M., Raju, KRK., Raju, KSVP and Prasad, JR (2000) Remote sensing applications for the evaluation of water resources in rainfed area, Warangal District, Andhra Pradesh. *The Indian Mineralogists* 34(2): 33-40.
- Murthy, KSR. (2000) Groundwater potential in a semi-arid region of Andhra Pradesh: A geographical information System approach, *International Journal of Remote Sensing* 21(9): 1867-1884.
- Obi Reddy, GP., Chandra Mouli, K, Srivasav, SK., Srinivas, CV and Maji, AK (2000) Evaluation of groundwater potential zones using remote sensing data- A case study of Gaimukh watershed, Bhandara district, Maharashtra. *J. Indian Soc. Remote sensing* 28(1): 19-32.
- Pratap Kamaleshwar, Ravindran, KV and Prabakaran, B (2000) Groundwater prospect zoning using remote sensing and Geographical Information System: A case study in Dala-Renukoot Area, Sonbhadra District Uttar Pradesh. *J Indian Soc. Remote Sensing* 28(4): 249-263.
- Pratap Kamaleshwar, Ravindran, KV., Prabakaran, B. and Jaganathan, C (1997) Groundwater investigation in Dala- Renukoot area, Sone Valley, Sonbhadra district, UP; *Remote Sensing for Natural resources*, Ed. K. V. Ravindran et al., ISRS- NNRMS publication: 403-411.
- Rao, M. S., Kumar, B., Nachiappan Rm. P, Jagmohan, (2001) Identification Of Aquifer Recharge Sources and Zones in Parts of Ganga- Yamona Doaba Using Environmental Isotopes. *ICIWRM-2000 Proceedings Of International Conference On Integrated Water Resources Management For Sustainable Development, 2000, New Delhi India*, PP 271-281.
- Ravi, PS., and Devendra Mishra. (1993) Identification of groundwater prospective zones using remote sensing and geoelectrical methods in and around Saidanagar area, Dakor block, Jalaun District, Uttar Pradesh. *Photonirvachak, J. of Indian Soc. of Remote Sensing* 21(4): 217-227.

- Ravindran, KV and Jeyaram, A (1997) Groundwater prospects of Shahbad Tehsil, Baran District, and Eastern Rajasthan: A remote sensing approach, *Journal of Indian Society of Remote Sensing* 25(4): 239-246.
- Rose, S (1992) Tritium in groundwater of the Georgia Piedmont: Implication for recharge and flow paths, *Hydrological processes* 6:67-78.
- Saraf, AK and Chaudhary, PR. (1998) Integrated remote sensing and GIS for groundwater exploration and identification of artificial recharges sites, *International Journal of Remote sensing* 19(10): 1825-1841.
- Simpkins, WW (1991) Age of groundwater at the till hydrology site. In: R.S. Kanwar, J. L. Baker, R. E. Hooorton, R. L Handy, LC. Jones, WW. Simpkins and A. Lutenegger (Editors), *Aquitard Hydrology Project, Ames Research Site, Annual Progress Report, 1990-1991*, Department of Natural Resources, Geological Survey Bureau, IA, 145 p.
- Simpkins, WW. (1995) Isotopic composition of precipitation in central Iowa, *Journal of Hydrology* 172: 185-207.
- Simpkins, WW. and Parkin, TB (1993) Hydrogeology and redox geochemistry of CH<sub>4</sub> in a late Wisconsinan till and loess sequence in central Iowa, *Water Resource Research* 29: 3643-3657.
- Simpkins, WW and Bradbury, KR (1992) Groundwater flow, velocity, and age in a thick, fine-grained till unit in southeastern Wisconsin. *Journal of Hydrology* 132: 283-319.
- Singh, LM., Roy, PK., Roy, AK. and Anand, R (1993) Application of remote sensing and geographical Information In Hydrogeologic investigation of Imphal Valley (Manipur). *Proc. Nat. Symp. Remote Sensing Application for Resource Management with Special Emphasis on NE Region, Guwahati, Nov. 25-27, 1993*: 143-147.
- Srivastava, PK. and Bhattacharya, Ak. (2000) Delineation of groundwater potential zones in a hard rock terrain of Bargarh District, Orissa using IRS data. *Journal of Indian Society of Remote Sensing* 28(2&3): 129-140.
- Sukhija BS, Reddy DV, Nagabhushanam P, Chand R (1988) Validity of the environmental method for recharge evaluation of coastal aquifers, India, *Journal of Hydrology* 99: 349-366.
- Sukhija BS, Reddy DV, Nandakumar MV (2003) Study of natural recharge processes and quantification of natural and artificial recharge to semi-arid aquifers of India using tracers. *11 Biennial Symposium on the Groundwater Recharge, Phoenix, AZ*:1-10.
- Sukhija BS, Shah CR., 1976. Conformity of groundwater recharge rate by Tritium method and mathematical modeling. *Journal of Hydrology* 30: 167-178.
- Sukhija, BS and Rama, (1973) Evaluation of groundwater recharge in semi-arid region of India using environmental Tritium. Ph.D Thesis, University of Bombay, Bombay, 139p.

- Sukhija, BS, Nagabhushanam, P, Reddy, DV (1996a) Groundwater recharge in semi-arid regions of India, an overview of results using tracer, *Hydro-geology Journal* 4/3: 50-71.
- Sukhija, BS., Nagabhushanam, P, Reddy, DV, (1996b) Groundwater recharge in semi-arid regions of India, an overview of results using tracer, *Hydro-geology Journal*,174 (nos 1&2): 77-97.
- Teeuw, RM. (1999) Groundwater Exploration using Remote sensing and A Low-Cost Geographical Information System"., *Hydrogeology Journal* 3: 21-30.
- Thomas, A, Sharma, MK. and Anil Sood (1999) Hydrogeomorphological mapping in assessing groundwater by using remote sensing data- A case study in Lehra Gage Block, Sangrur district, Punjab. *Journal of Indian Society of Remote Sensing*, 27(1): 31-42.
- Tiwari. and Rai, B (1996) Hydromorphological mapping for groundwater prospecting using land sat- MSS Images-A case study pf part of Dhanbad District, Bihar, *Journal of Indian Society o Remote Sensing* 24(4): 281-285.
- Verhagan B, Smith TH, McGeorge PE, Dziembowski, I (1979) Tritium profiles in Kalahari sand as a measure of rainwater recharge. *Proc. of Isotope Hydrology, IAEA,Vienna: 733-749.*
- Zimmerman, U. Ehhalt, D. and Munnich, KO. (1967a) Soil water movement and evapotranspiration: changes in isotopic components of soil water. In: *Isotopes in hydrology Proc. Symp. Vienna: 567-585.*
- Zimmerman U, Munnich KO, Roether W (1967b) Downward movement of soil moisture traced by means of hydrogen isotopes. In: Glenn ES (ed) *Isotope techniques in the hydrologic cycle, Amircan Geophysics Union, Geophysics Monograph 11: 28-36.*
- Zuber, A., Weise, SM., Motyka, J., Osenbruck, K Rozanski, K. (2003) Age and flow pattern of groundwater in Jurassic limestone aquifer and related Tertiary sands derived from combined isotope, noble gas and chemical data, *Journal of hydrology (in press), Vol. xx, pp. 1-26.*